dantech
ENERGY OUTSIDE THE BOX


TECHNICAL SPECIFICATION

TN6S3P-RS60


6S3P · Reliance INR21700-RS60 · 18 cells

21.6 V	18 Ah	389 Wh	150 A	240 A	1.39–1.51
NOMINAL VOLTAGE	CAPACITY	ENERGY	CELL BLOCK, CONTINUOUS	CELL BLOCK, PULSE (PEAK)	WEIGHT, KG

1 DIMENSIONS

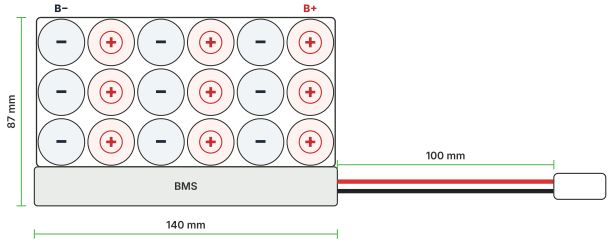

TOP VIEW, WITH 60A OR 80A BMS · + positive up − negative up

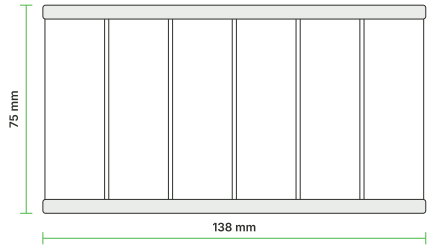

SIDE VIEW

BUILD	L × W × H	WEIGHT
No BMS	138 × 69 × 75 mm	1.39 kg
60A or 80A BMS	140 × 87 × 75 mm	1.51 kg

Tolerance ±3 mm. Main leads exit along the long side; lead length is measured from the pack end to the connector. Weight is calculated, not measured.

2 ELECTRICAL

Configuration	6S3P, 18 cells
Cell	Reliance INR21700-RS60
Nominal voltage	21.6 V
Maximum charge voltage	25.2 V
Minimum discharge voltage	15 V
Capacity	18 Ah
Energy	389 Wh
Maximum charge current	36 A
Charge temperature (cell)	-20 to 60 °C
Discharge temperature (cell)	-40 to 80 °C

3 INTERFACES

Main leads	10 AWG silicone (12 AWG on MPC30 builds), red / black
Lead length	100 mm
Balance lead (no-BMS builds)	XH 7-pin, 100 mm
Connector options	XT90, MPC60, MPC30, AS150U
BMS options	60A, 80A or none
BMS communication	UART, RS485 (60A); UART, RS485/CAN optional (80A and up)
Interconnects	Nickel-copper stamp, 0.15 + 0.3 mm

4 CURRENT LIMITS BY CONFIGURATION

BMS	CONNECTOR	CONTINUOUS	PEAK, 30 S	SHORT PULSE
No BMS	XT90	**50 A** Connector	**60 A** Connector	**60 A** Connector, 1 min
No BMS	MPC60	**60 A** Connector	**202 A** Connector*	**240 A** Cells
No BMS	MPC30	**30 A** Connector	**104 A** Connector*	**180 A** Connector, 10 s
60A Smart BMS	AS150U	**60 A** BMS	**80 A** BMS	**140 A** Connector, 1 min
60A Smart BMS	MPC60	**60 A** BMS	**80 A** BMS	**180 A** BMS, 2 s
60A Smart BMS	MPC30	**30 A** Connector	**80 A** BMS	**180 A** BMS, 2 s
80A Smart BMS	AS150U	**70 A** Connector	**90 A** BMS	**140 A** Connector, 1 min
80A Smart BMS	MPC60	**60 A** Connector	**90 A** BMS	**240 A** Cells
80A Smart BMS	MPC30	**30 A** Connector	**90 A** BMS	**180 A** Connector, 10 s

Each limit is the lowest of the cell block, the BMS and the connector; the limiting part is named next to each value. Cell block: 3 × 50 A continuous, 3 × 80 A pulse (max tested current, Reliance rate test at RT). Connector values are the manufacturers' ratings (HARTING, Amass) for the lead gauge used; Amass continuous ratings are at 60 °C temperature rise. * Derived from HARTING's 10 s rating by I^2t scaling; HARTING publishes no 30 s value. Values are at 25 °C.

5 BMS OPTIONS

BMS	CONTINUOUS	30 S	SHORT PULSE	COMMUNICATION	SIZE
60A Smart BMS	60 A	80 A	180 A (2 s)	UART, RS485	140 × 65 × 18 mm
80A Smart BMS	80 A	90 A	260 A (0.5 s)	UART (RS485, CAN optional)	140 × 65 × 18 mm

All BMS options provide cell over- and under-voltage, over-current, short-circuit and temperature protection, with passive cell balancing.

6 BUILD

Cells	**18 × Reliance INR21700-RS60**
Interconnects	**Nickel-copper stamps**
Main leads	**10 AWG silicone (12 AWG on MPC30 builds) wire**
Balance lead	**XH 7-pin harness (no-BMS builds)**
Protection	**Smart BMS (optional)**
Connector	**Per selected option**

7 HANDLING

- Charge with a CC/CV charger set to 25.2 V, at or below 36 A.
- Packs without BMS need external cell protection; balance them through the XH 7-pin lead.
- Keep within the temperature ranges above. Do not charge unattended.
- Store at 30–50% charge, dry and away from heat.
- Ship as UN 3480 lithium-ion battery.